
# TDS Model B2S800H





## DIMENSIONS

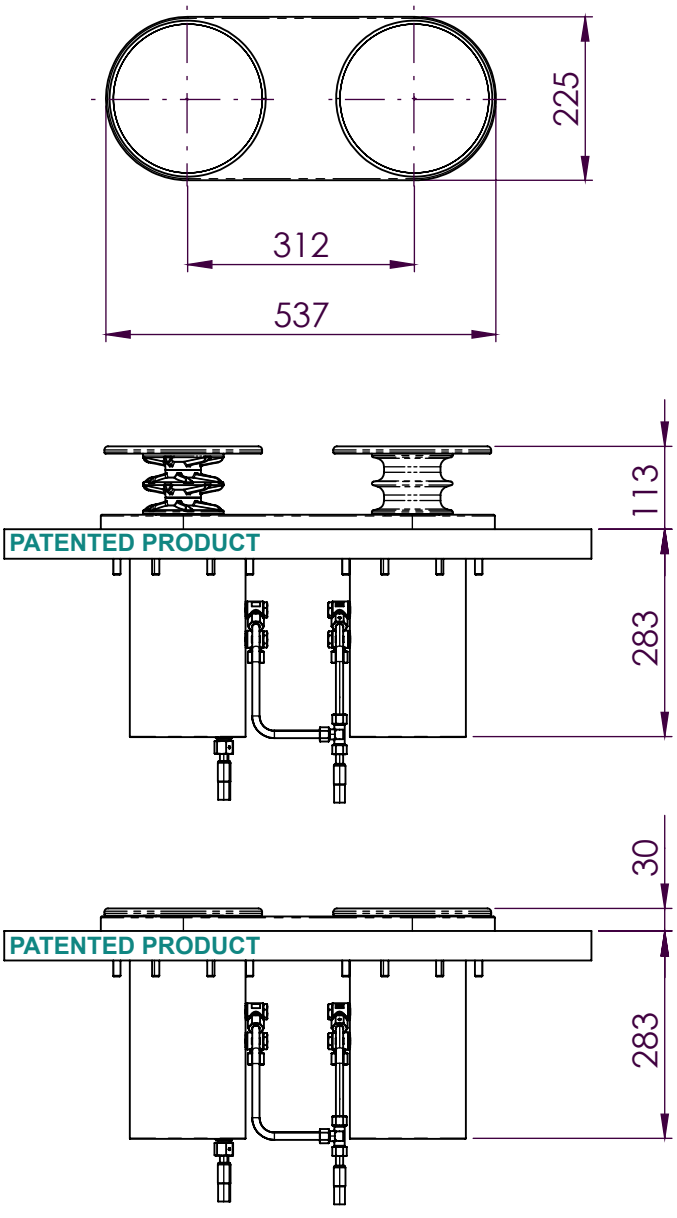


## TECHNICAL DATA

| | |
|---|---|
| **Model** | B2S800H |
| **Work preassure** | 160 Bar |
| **Intermittent Preassure** | 200 Bar |
| **Peak Preassure** | 225 Bar |
| **Hydraulic Duty Cycle** | 30 Min / 30 Min |
| **Maximum Rope Speed** | 9M / Min |
| **Output Shaft Speed** | 30RPM |
| **Output Shaft Torque** | 400Nm |
| **Load In Work** | 8340N - 850 kg |
| **Maximum Load** | 10420N - 1050Kg |
| **Tot Weight** | 150kg |
| **Included Command** | Double Way Footswitch - Control Box |
| **Material** | Stainless steel AISI 316 L |
| **Mooring Line Section Range** | 25mm - 40mm |
| **Vessel Length (Suggested)** | 95 - 100ft / 29 - 31mt |
| **Vessel Weight (Suggested)** | 85 - 120 Tons |

The Self Tailing Cleat

bonomi
earth and sea innovations