


Description Double mechanical Paker for ground injection, to be used with TAM pipe diameter 27 mm

Uses

Used inside of the TAM for low diameter pipe ID 27 mm to made ground injection



Product Benefits


provides some of the following merits:

- ⇒ Easy to use
- ⇒ Is created with the middle corps in strung rubber pipe
- ⇒ The rubber pipe is flexible and help in the injection
- ⇒ Doble and cup
- ⇒ Easy to handle in site for the smaller length



Technical details

Physical Characteristic	Value	U.M.	Tolerance
Diameter of cup	27	mm	±1%
TAM Internal Pipe Diameter	27	mm	±1%
Connection to main injection pipe	F-1/2" Gas	-	-
Maximal pressure	25	bar	±1%

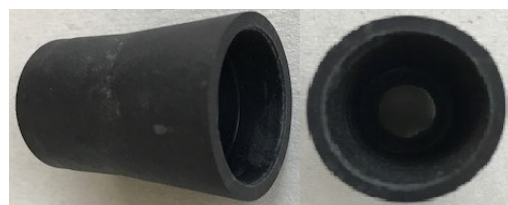

Packaging

Packed in carton of n°10 pieces
Polymer Cup in carton of 20 pieces